



LED LIGHT LIFE



CONTENT

RGB spotlight- low voltage	page 3
RGB spotlight- high voltage	page 4
RGB bulb	page 5
RGB egg	page 5
Spotlight - die-casting	page 6
Spotlight - CNC super bright	page 7
Light bulb - A series / R series	page 8
Light bulb - candle / golfball / G series	page 9
Light bulb - dimmable / decorative	page 10
LED tube	page 11
LED strip	page 12
Down light	page 13
PAR lamp	page 14

RGB series

It is time to change your mood now. Just try to control it by yourself. This series of lamps are color changing type, 16 single colors to be choose, and 16 million mixed colors decorate you space. It is suitable used in pub, club, store, supermarket, bedroom.

2



RGB-MR16 60°

Item: TL-RBA1PMO-CC
 Voltage: 12V ac/dc
 Watt: 5 W
 Base: GU5.3
 Color: 16
 Lens: convex acrylic
 Beam angle: 60°
 Mode: flash / strobe
 fade / smooth
 Size: dia 50 x h57 mm
 Control distance: 5~8 m
 Remote: optional



RGB-MR16 90°

Item: TL-RBA1PMO-CP
 Voltage: 12V ac/dc
 Watt: 5 W
 Base: GU5.3
 Color: 16
 Lens: flat glass
 Beam angle: 90°
 Mode: flash / strobe
 fade / smooth
 Size: dia 50 x h50 mm
 Control distance: 5~8 m
 Remote: optional

LOW VOLTAGE



德国TUV认证

RGB series

It can show you the best performance.
What you should do is just screw the lamp
to the relative socket, then enjoy the
finger touch with the remote.

HIGH VOLTAGE



3

RGB HIGH VOLTAGE


RGB-GU10 / JDR / B22 60° / 90°

Voltage:	100~240V 50/60Hz
Watt:	5 W
Base:	GU10 / E27 / E14 / B22
Color:	16
Lens:	convex acrylic / flat glass
Beam angle:	60° / 90°
Mode:	flash / strobe / fade / smooth
Control distance:	5~8 m
Remote:	optional



GU10

E27/E14/B22



60°

Dia50 x 68

Dia50 x 98



90°

Dia50 x 60

Dia50 x 90



德国TUV认证

RGB series

HIGH VOLTAGE



德国TUV认证



4

RGB-Bulb


Voltage: 100~240V 50/60 Hz
Watt: 5 W
Base: GU10 / E27 / B22
Color: 16
Lens: milky white glass
Mode: flash / strobe / fade / smooth
Control distance: 5~8 m
Remote: optional



NEW

RGB-egg

Voltage: 100~240V 50/60 Hz
Watt: 5 W
Base: round aluminum base
Color: 16
Lens: milky rubber
Mode: flash / strobe / fade / smooth
Control distance: 5~8 m
Remote: optional
Size: dia115 x h175 mm

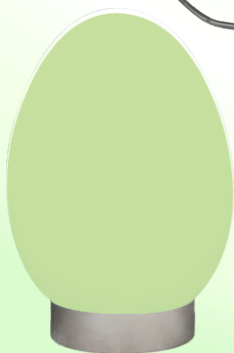

Spotlight - die-casting

Here you may find the smallest LED spotlight of the world. MR11, as a member of LED spotlight family, It attracts many people's eyes, especially the jewelers'.



Item	Model	CCT	Watts	Voltage	Led qty	Base	Lumens	Beam angle	Size (LxH mm)
TL-SAW1AMO-C	MR11 1x1W	Warm white	1.7 W	12 V ac/dc	1 pcs	G4	80~90	38°	35 x 29
		Natural white							
		Cool white							

5



MR16 3x1W



GU10 3x1W



E27 3x1W



E14 3x1W



SPOTLIGHT

Item	Model	CCT	Watts	Voltage	Led qty	Base	Lumens	Beam angle	Size (LxH mm)
TL-SAW3BMM-C	MR16 3x1W	WW / NW / CW	4.0 W	12 V ac/dc	3 pcs	G5.3	150~180	38°	50 x 40
TL-SAW3CKO-C	GU10 3x1W	WW / NW / CW	4.0 W	100-240V~	3 pcs	GU10	150~180	38°	50 x 46
TL-SAW3DKO-C	JDR 3x1W	WW / NW / CW	4.0 W	100-240V~	3 pcs	E27/E14	150~180	38°	50 x 75



E14 1x3W



E27 1x3W



GU10 1x3W



MR16 1x3W



Item	Model	CCT	Watts	Voltage	Led qty	Base	Lumens	Beam angle	Size (LxH mm)
TL-SBW1BMQ-C	MR16 1x3W	WW / NW / CW	3.0 W	12 V ac/dc	1 pcs	G5.3	100~130	38°	50 x 40
TL-SBW1CKQ-C	GU10 1x3W	WW / NW / CW	3.0 W	100-240V~	1 pcs	GU10	100~130	38°	50 x 46
TL-SBW1DKQ-C	JDR 1x3W	WW / NW / CW	3.0 W	100-240V~	1 pcs	E27/E14	100~130	38°	50 x 75



MR16 1x1W



GU10 1x1W



E27 1x1W




E14 1x1W

Item	Model	CCT	Watts	Voltage	Led qty	Base	Lumens	Beam angle	Size (LxH mm)
TL-SAW1BMO-C	MR16 1x1W	WW / NW / CW	1.7 W	12 V ac/dc	1 pcs	G5.3	80~90	38°	50 x 40
TL-SAW1CKO-C	GU10 1x1W	WW / NW / CW	1.8 W	100-240V~	1 pcs	GU10	80~90	38°	50 x 46
TL-SAW1DKO-C	JDR 1x1W	WW / NW / CW	1.8 W	100-240V~	1 pcs	E27/E14	80~90	38°	50 x 75

Spotlight - CNC SUPER BRIGHT

6



900Lux/m



MR16 3x1W



GU10 3x1W



E27 3x1W



E14 3x1W

Item	Model	CCT	Watts	Voltage	Led qty	Base	Lumens	Beam angle	Size (h mm)
TL-SAW3B2MM-C	MR16 3x1W	WW / NW / CW	4.2 W	12 V ac/dc	3 pcs	G5.3	180~220	38°	50 x 40
TL-SAW3C2ML-C	GU10 3x1W	WW / NW / CW	4.5 W	100-240V~	3 pcs	GU10	180~220	38°	50 x 46
TL-SAW3D2ML-C	JDR 3x1W	WW / NW / CW	4.5 W	100-240V~	3 pcs	E27/E14	180~220	38°	50 x 76



MR16 4x1W



GU10 4x1W



GU10 3x2W



GU10 3x2W

Item	Model	CCT	Watts	Voltage	Led qty	Base	Lumens	Beam angle	Size (h mm)
TL-SAW4PMR-C	MR16 4x1W	WW / NW / CW	5.3 W	12V ac/dc	4 pcs	G5.3	350~400	38°	50 x 40
TL-SAW4QLR-C	GU10 4x1W	WW / NW / CW	6.0 W	100-240V~	4 pcs	GU10	350~400	38°	50 x 46
TL-SBW3CLR-C	GU10 3x2W	WW / NW / CW	6.0 W	100-240V~	3 pcs	GU10	230~270	38°	50 x 60
TL-SBW3QKQ-C	GU10 3x2W	WW / NW / CW	5.5 W	100-240V~	3 pcs	GU10	210~240	38°	50 x 60

Spotlight - SMD LED series



MR16-30SMD



GU10-30SMD



E27-30SMD



E14-30SMD

Item	Model	CCT	Watts	Voltage	Led qty	Base	Lumens	Beam angle	Size (h mm)
TL-SCW30BME-C	MR16 30SMD	WW / NW / CW	2.3 W	12 V ac/dc	30 pcs	G5.3	130~160	90°	50 x 40
TL-SCW30CKE-C	GU10 30SMD	WW / NW / CW	3.2 W	100-240V~	30 pcs	GU10	130~160	90°	50 x 46
TL-SCW30DKE-C	JDR 30SMD	WW / NW / CW	3.2 W	100-240V~	30 pcs	E27/E14	130~160	90°	50 x 75

SPOTLIGHT

Type A

A50

Item	Model	CCT	Watts	Voltage	Led qty	Base	Lumens	Size (LxH mm)
TL-BAW3OLR-C	A50 3x1W	WW / NW / CW	4.2 W	100-240V~	3 pcs	E27/B22	180~220	50 x 90



7

A60

Item	Model	CCT	Watts	Voltage	Led qty	Base	Lumens	Size (LxH mm)
TL-BBW3TLR-C	A60 3x2W	WW / NW / CW	5.6 W	100-240V~	3 pcs	E27/B22	240~270	60 x 103
TL-BAW4TLR-C	A60 4x1W	WW / NW / CW	5.0 W	100-240V~	4 pcs	E27/B22	270~300	60 x 103
TL-BHW18TLH-C	A60 18SMD	WW / NW / CW	4.3 W	100-240V~	18 pcs	E27/B22	240~270	60 x 103
TL-BAW5TLR-C	A60 5x1W	WW / NW / CW	6.5 W	100-240V~	5 pcs	E27/B22	300~360	60 x 103



Type R

R50

Item	Model	CCT	Watts	Voltage	Led qty	Base	Lumens	Size (LxH mm)
TL-BAW3R50D1LO-C	R50 3x1W	WW / NW / CW	4.2 W	100-240V~	3 pcs	E14	180~220	50 x 86



R63

Item	Model	CCT	Watts	Voltage	Led qty	Base	Lumens	Size (LxH mm)
TL-BAW5XLR-C	R63 5x1W	WW / NW / CW	6.0 W	100-240V~	5 pcs	E27	300~360	63 x 105
TL-BBW3XLR-C	R63 3x2W	WW / NW / CW	5.6 W	100-240V~	3 pcs	E27	240~270	63 x 105



Bulb

Candle

8



E27



B22



E14



BA15d

Item	Model	CCT	Watts	Voltage	Led qty	Base	Lumens	Size Φ x h mm
TL-BBW1V1LR-C	C35 1x1W	WW / NW / CW	1.8 W	100-240V~	1 pcs	E14/BA15d	70~90	35x100
TL-BBW1VLR-C	C35 1x2W	WW / NW / CW	2.6 W	100-240V~	1 pcs	E27/B22	90~110	35x100
TL-BHW1V1LH-C	C35 6SMD	WW / NW / CW	2.0 W	100-240V~	6 pcs	E14/E27/B15/B22	60~80	35x100

Golfball



E27



B22



E14



BA15d

Item	Model	CCT	Watts	Voltage	Led qty	Base	Lumens	Size Φ x h mm
TL-BBW1V1LR-C	G45 1x2W	WW / NW / CW	2.6 W	100-240V~	1 pcs	E14/BA15d	90~110	45x78
TL-BBW1VLR-C	G45 1X2W	WW / NW / CW	2.6 W	100-240V~	1 pcs	E27/B22	90~110	45x72
TL-BHW9ULH-C	G45 9SMD	WW / NW / CW	2.6 W	100-240V~	6 pcs	E27/B22	90~110	45x72

G60



G60 3x1W

Item	TL-BAW3I60KO-C
Model	G60 3x1W
CCT	Warm White / Cool White
Watts	4.2 W
Voltage	100-240 V~
Led qty	3 pcs
Base	E27/B22
Lumens	180~220 lm
Size	Φ60 x h125 mm



G60 5x1W

Item	TL-BAW5I60KO-C
Model	G60 5x1W
CCT	Warm White / Cool White
Watts	6.2 W
Voltage	100-240 V~
Led qty	5 pcs
Base	E27/B22
Lumens	300~360 lm
Size	Φ60 x h125 mm

Bulb

Dimmable



9



The dimmable bulb is performed with its built-in dimmable driver. Do you ever use a dimmer in you home? That is it. You can still remain you lovely dimmer. Just screw this dimmable bulb on the socket.

Item	Model	CCT	Watts	Voltage	Led qty	Base	Lumens	Size ΦxH mm
TL-BAW5TKR-Y	A60 5x1W	WW / NW / CW	7.0 W	100/240V~	5 pcs	E27/B22	300~360	60x103
TL-BBW3TKR-Y	A60 3x2W	WW / NW / CW	6.0 W	100/240V~	3 pcs	E27/B22	280~320	60x103
TL-BAW5XKR-Y	R63 5x1W	WW / NW / CW	7.0 W	100/240V~	5 pcs	E27/B22	300~360	60x105
TL-BAW3XKR-Y	R63 3x2W	WW / NW / CW	6.0 W	100/240V~	3 pcs	E27/B22	280~320	60x105
TL-SBW3CKR-Y	GU10 3x2W	WW / NW / CW	6.0 W	100/240V~	3 pcs	E27/B22	280~320	50x60

Decorative Bulb

single colour bulbs, decorate the festival, bedroom, kitchen, cupboard, cabinet.

Candle



Golfball




Tube

Special aluminum body, shape "D". It performs a excellent thermal diffusion effect. So you will feeling the heat on the surface. This could make sure its lifespan up to 30,000 hours.




10

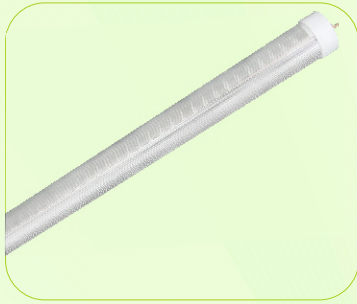

T8

high lumens 3528SMD LED
shape "D" Aluminum body
safty power supply
transparent stripe cover

Item	Model	CCT	Watts	Voltage	Led qty	Angle	Lumens	Size L x L, mm
TL-ICW144OKF-C	T8-60cm	WW / NW / CW	9.0 W	100/240V~	144 pcs	120°	820~840	26 x 600
TL-ICW288OKF-C	T8-120cm	WW / NW / CW	16.0 W	100/240V~	288 pcs	120°	1640~1680	26 x 1200
TL-ICW300OKF-C	T8-150cm	WW / NW / CW	18.0 W	100/240V~	300 pcs	120°	2010~2050	26 x 1500

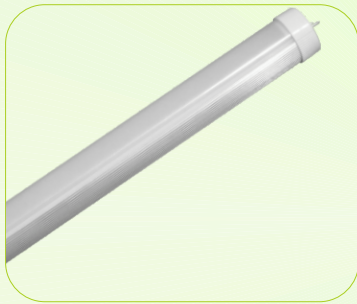


T10

high lumens 3528SMD LED
shape "D" Aluminum body
safty power supply
frosted cover

Item	Model	CCT	Watts	Voltage	Led qty	Angle	Lumens	Size L x L, mm
TL-FCW144OKF-C	T10-60cm	WW / NW / CW	9.0 W	100/240V~	144 pcs	120°	780~810	30x600
TL-FCW288OKF-C	T10-120cm	WW / NW / CW	16.0 W	100/240V~	288 pcs	120°	1540~1600	30x1200
TL-FCW300OKF-C	T10-150cm	WW / NW / CW	18.0 W	100/240V~	300 pcs	120°	1900~1980	30x1500

Panel Light

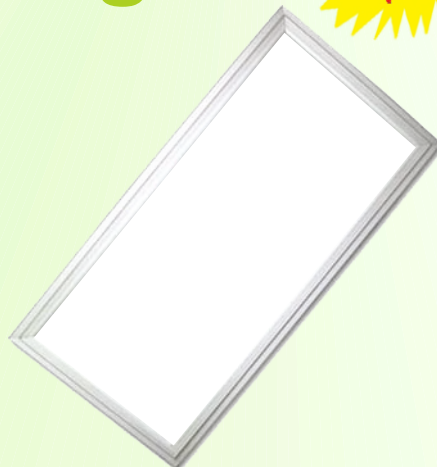

300x300mm

300x600mm

600x600mm

NEW

Strip - touch

This LED touch strip let the life become easier. It could be mounted to any position and on any surface, as well as you can imagine. Multi strips could be line together. We can customize the length for every customer's usage.




"RGB strip still available"




11

Item	Model	CCT	Watts	Voltage	Led qty	Angle	Lumens	Size (L x W x H mm)
TL-TCW123ODE-C	strip-3528/60cm	WW / NW / CW	10.0 W	100-240V~	123 pcs	120°	600~650	600x20x14.2
TL-TCW213ODE-C	strip-3528/100cm	WW / NW / CW	16.0 W	100-240V~	213 pcs	120°	900~1000	1000x20x14.2
TL-TCW36ODI-C	strip-5050/60cm	WW / NW / CW	10.0 W	100-240V~	36 pcs	120°	480~540	600x20x14.2
TL-TCW60ODI-C	strip-5050/100cm	WW / NW / CW	14.0 W	100-240V~	60 pcs	120°	850~900	1000x20x14.2
???	???	WW / NW / CW	???	100-240V~	???	120°	???	???

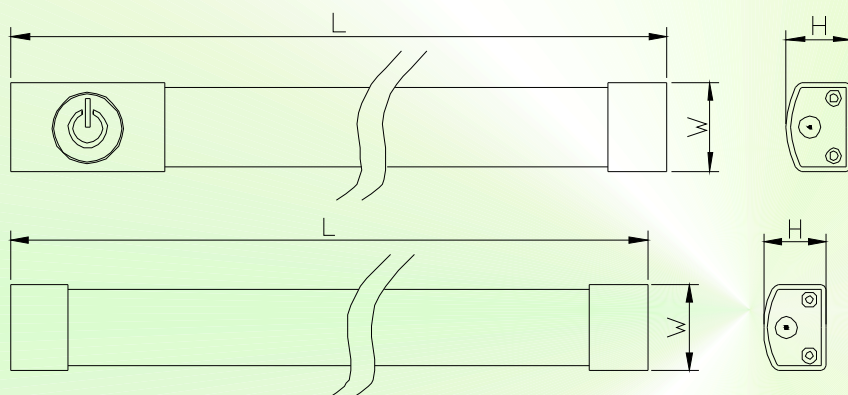

(custom-made length available)

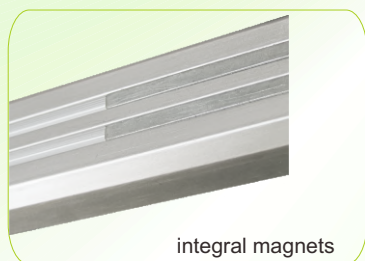

Magnet



Clip-on




Stick-on




Downlight


12



Ceiling 3x1W



Ceiling 5x1W

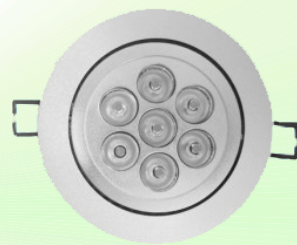

Ceiling 7x1W

Item	Model	CCT	Watts	Voltage	Led qty	Angle	Lumens	Size (D x H, mm)
TL-HAW3OLO-C	Ceiling 3x1W	WW / NW / CW	4.0 W	100/240V~	3 pcs	38°	170~200	90x48
TL-HAW5OLO-C	Ceiling 5x1W	WW / NW / CW	6.0 W	100/240V~	5 pcs	38°	280~350	108x68
TL-HAW7OLO-C	Ceiling 7x1W	WW / NW / CW	9.0 W	100/240V~	7 pcs	38°	350~450	108x68




Ceiling 9x1W



Ceiling 12x1W

Item	Model	CCT	Watts	Voltage	Led qty	Angle	Lumens	Size (D x H, mm)
TL-HAW9OLO-C	Ceiling 9x1W	WW / NW / CW	13.0 W	100/240V~	9 pcs	38°	480~600	133x68
TL-HAW12OLO-C	Ceiling 12x1W	WW / NW / CW	16.0 W	100/240V~	12 pcs	38°	680~750	133x68

PAR Lamp

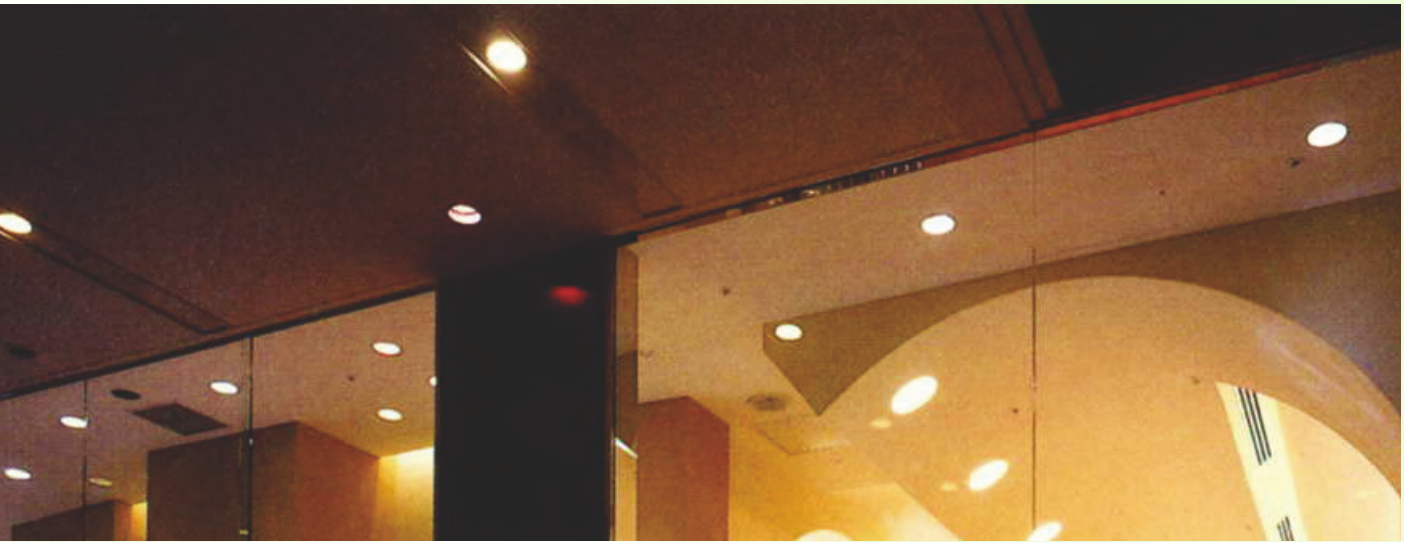

13



PAR20 5x1W



PAR30 5x1W



PAR30 7x1W

Item	Model	CCT	Watts	Voltage	Led qty	Angle	Lumens	Size (DxH mm)
TL-SAW5FLO-C	PAR20 5x1W	WW / NW / CW	6.0 W	100~240V~	5 pcs	38°	280~350	64x86
TL-SAW5GLO-C	PAR30 5x1W	WW / NW / CW	6.0W	100~240V~	5 pcs	38°	280~350	95x100
TL-HAW7OLO-C	PAR30 7x1W	WW / NW / CW	8.0 W	100~240V~	7 pcs	38°	350~450	95x100



PAR38 9x1W



PAR38 12x1W

Item	Model	CCT	Watts	Voltage	Led qty	Angle	Lumens	Size (DxH mm)
TL-SAW9HLO-C	PAR38 9x1W	WW / NW / CW	10.0 W	100~240V~	9 pcs	38°	480~600	122x128
TL-SAW12HLO-C	PAR38 12x1W	WW / NW / CW	13.0 W	100~240V~	12 pcs	38°	680~750	122x128

